


IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	160 Ω	348 Ω	514 Ω
Minimum	- Ω	278 Ω	- Ω

Z vs. FREQUENCY  
(REF. ONLY)

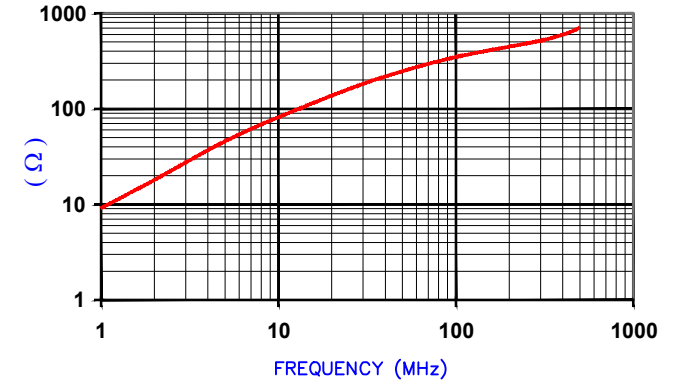

AGILENT E4991A Impedance/Material Analyzer  
HP 16092A-Test Fixture. TEST REF. 5452

NOTES:

- CASE COLOR: WHITE-0A0.
- CASE FLAMMABILITY RATING: UL94 V-2.
- CASE MATERIAL: Halogen Free Nylon
- CORE DIMENSIONS REFER TO 28A0807-000 SPEC. FERRITE CORE DIMENSION IS FOR INTERNAL PURPOSE TO ENHANCE FITTING TO CASE AND ELECTRICAL CHARACTERISTICS ONLY.

CASE DIMENSIONS:

A	24.82 [.977]	+	1.00 [.039]
B	10.00 [.394]	+	1.00 [.039]
C	55.91 [2.201]	+	2.00 [.079]
D	-	+	-
E	7.20 [.283]	+	1.00 [.039]

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
				PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
				28A0807-0A0	B	FERRITE SNAP-ON	Jcai
				DATE:	SCALE:	MATERIAL:	
				03/14/14	1:1	Ferrite	
				CAD #	TOOL #		
				28A0807-0A0-B	-		
REV	DESCRIPTION	DATE	INT				
A	ORIGINAL DRAFT	05/16/13	Jcai				
B	UPDATE CASE DIMENSIONS REMOVE CORE DIM AND ADD NOTE 4	03/14/14	Jcai				