


Connectors according to DIN 41612 / IEC 60603-2


Type F low profile

Female connector

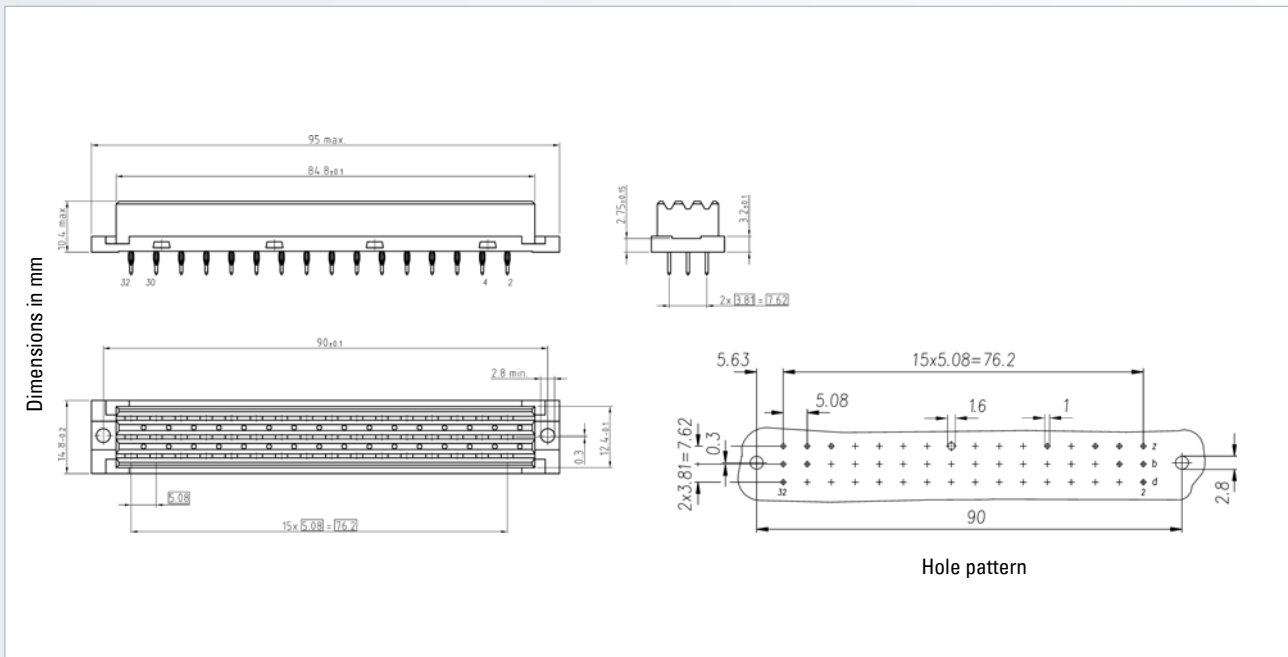

| No. of contacts | Contact arrangement | Press-fit technology – Performance level II | |
|-----------------|---------------------|---|-----------|
| | | Termination length | |
| | | | |
| | | Part number | |
| 32 | | 110-61005 | 110-66025 |
| 32 | | 110-61004 | 110-66015 |
| 48 | | 110-61084 | 110-66065 |

| | | |
|---|---|--|
| Accessories – Press-fit tool (see page 208) – Support tool (see page 209) – Coding accessories (see page 160) | On request – Performance level I + III or customer-specific – Special contact length | Options – Without flange – Special contact arrangement (see page 162) |
| Note – * Rear mating zone performance level II | | |

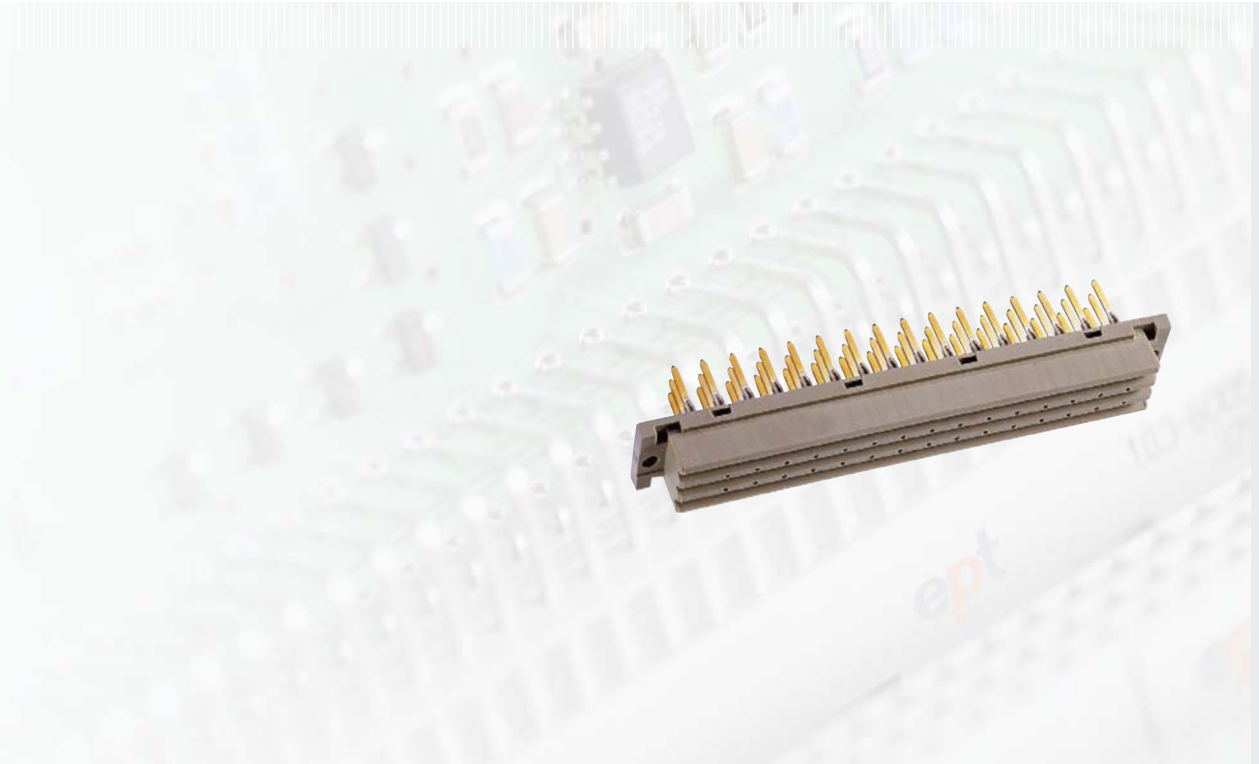

| No. of contacts | Contact arrangement | Solder technology – Performance level II |
|-----------------|---------------------|--|
| | | Termination length |
| | | |
| | | Part number |
| 32 | | 110-40505 |
| 32 | | 110-40504 |
| 48 | | 110-40584 |

| | | |
|---|---|---|
| Accessories – Coding accessories (see page 160) | On request – Performance level I + III or customer-specific – Special contact length – Also in THTR | Options – Board lock (see page 159) – Special contact arrangement (see page 162) |
|---|---|---|