




- Primary / Secondary Insulation $\geq 4000V$ • Primary / Auxiliary Insulation $\geq 1500V$
- Creepage distance Primary / Secondary $\geq 8mm$
- Ambient temperature $< 50^{\circ}C$
- Construction conforms to IEC950, IEC335, IEC61558 for reinforced insulation
- Exclusively uses UL94-V0 listed materials

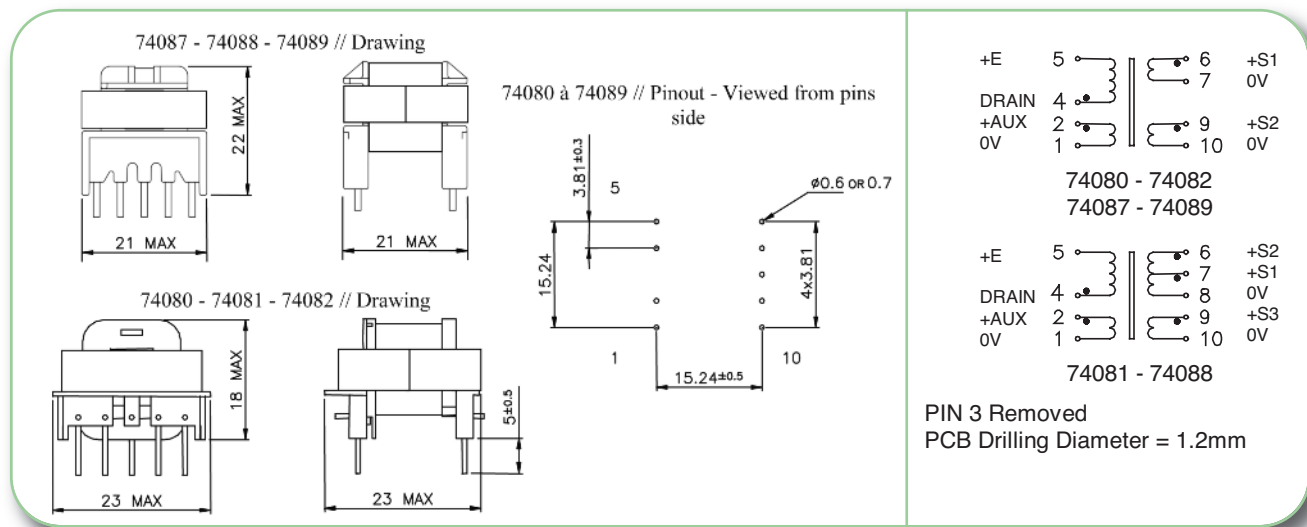

MYRRA P / N	Output Power maximum	Windings					
			Pins	Turns	Voltage	Current maximum	Inductance (+/-10%)
74080 74087	24 w	Pri	4 – 5	86	80 – 135 (VOR)	1.0 Apeak	1000 μ H
		Aux	2 – 1	12	11 - 18 Vdc	0.3 Adc	
		S1	6 – 7	10	9 – 15 Vdc	1.5 Adc	
		S2	9 – 10	10	9 – 15 Vdc	1.5 Adc	
74081 74088	20 w	Pri	4 – 5	80	75 (VOR)	0.9 Apeak	1100 μ H
		Aux	2 – 1	17	15 Vdc	0.3 Adc	
		S1	7 – 8	4	3.3 Vdc	3 Adc	
		S2	6 – 8	6	5 Vdc	Sum S1+S2	
		S3	9 – 10	14	12 Vdc	1.3 Adc	
74082 74089	20 w	Pri	4 – 5	86	60 – 135 (VOR)	0.85 Apeak	1300 μ H
		Aux	2 – 1	12	7 - 18 Vdc	0.3 Adc	
		S1	6 – 7	5	3 – 7.5 Vdc	2.0 Adc	
		S2	9 – 10	5	3 – 7.5 Vdc	2.0 Adc	

Note for 74080 and 74082 : S1 and S2 can be connected in series or in parallel

Examples of application with Integrated Circuits :

MYRRA P / N	Control IC Manufacturer	Input voltage	Power	Frequency
74080	Power Integrations	185 - 265Vrms	24w	132kHz
74087	Power Integrations	85 - 265Vrms	15w	132kHz
74081	Power Integrations	185 - 265Vrms	20w	132kHz
74088	Power Integrations	85 – 265Vrms	12w	132kHz
74082	Power Integrations	185 - 265Vrms	20w	132kHz
74089	Power Integrations	85 – 265Vrms	14w	132kHz
	Power Integrations	185 - 265Vrms	17w	< 120kHz



HIGH FREQUENCY FERRITE
POWER FERRITE TRANSFORMERS