



A	22.0Max
B	17.5Max
C	4.0 ± 1.0
E	10.0 ± 0.5
F	13.0 ± 1.0
G	0.8 ± 0.1
H	23.0Max

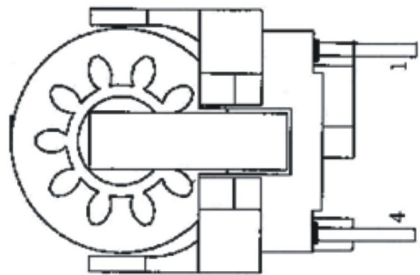

(WDG)	N1	N2
(PIN)	1-4	2-3
INDUCTANCE	(1-4) and (2-3)	6,8mH/+50% /-30% 10K/0.1mA
DCR	(1-4) and (2-3)	2.5 Ω Max
(TURN)	φ 0.23*150TS (REF)	φ 0.23*150TS (REF)
(WIRE)	UEW	UEW



RoHS Compliant		SCHMID-M	
APPD. HELEN		TOLERANCE .000 ±0.13 ANG±3° .00 ±0.25 .0 ±0.38	PART NAME
DWG. ABBY	SCALE	UNIT M M	PART NO. AUT20-682N-NP
DATE 2011/08/05	PAGE 1 OF 1	REV. A	