


Material:

- * Insulator: Glass filled polyester UL 94V-0
- * Contact: Brass
- * Shell: Steel, Tin plated as standard

Ordering Code:

CD91 25 P * * S*
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Contacts: 9,15,25,37
- ③ Contact type: P= Plug
- ④ Plating option:
 2= Gold flash plated over 1.27 μ m(50 μ "") Nickel
 A= Selective Gold flash plated over 1.27 μ m(50 μ "") Nickel
 B= Selective 0.38 μ m(15 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
 C= Selective 0.76 μ m(30 μ "") Gold plated over 1.27 μ m(50 μ "") Nickel
- ⑤ Insulator Color: 1= Black
 7= Blue
- ⑥ Other Option:
 S0= Metal shell with $\phi 3.4$ mm holes with S/R(Standard)
 S3= Metal shell with $\phi 3.4$ mm holes without S/R

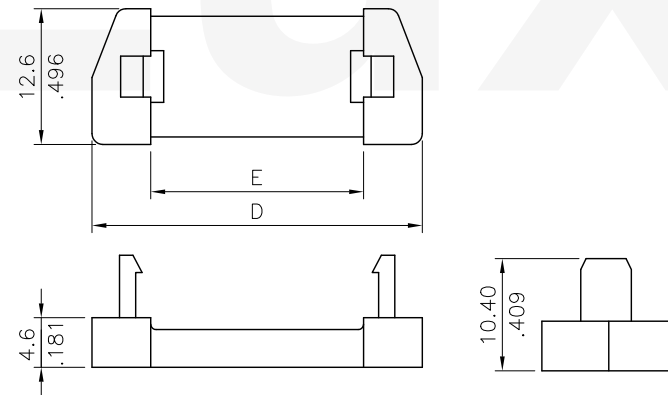


Strain relief

RoHS Compliant

Circuits	Dimension				
	A	B	C	D	E
9	25.00(.984)	30.8(1.213)	16.92(.666)	22.4(.882)	12.08(.476)
15	33.30(1.311)	39.2(1.543)	25.25(.994)	30.8(1.213)	19.70(.776)
25	47.10(1.854)	53.1(2.091)	38.96(1.534)	44.5(1.752)	32.40(1.276)
37	63.50(2.500)	69.4(2.732)	55.42(2.182)	61.4(2.417)	47.72(1.879)

CVILUX CORP
2010.11.30
ISSUED

④					DATE	UNIT: mm / inch	TITLE: INSULATION DISPLACEMENT D-SUB MALE CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
③				DRAWN BY: Una	11/18-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
②	Una	11/18-10'	ECN10373	ENGINEER: Clark	11/22-10'	.X \pm 0.30/.012 X* \pm 1"	FINISH:	DRAWING NO.	CD9102SE	PART NO.	CD91**P**S*
①	Sun	4/12/04'	ECN04153/ECR04036-0	CHECKED BY: David	11/22-10'	.XX \pm 0.20/.008 X* \pm		SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	11/22-10'	.XXX \pm 0.10/.004 XX* \pm					