

Circuits	Dimension				
	A	B	C	D	E
9	25.00(.984)	30.8(1.213)	16.30(.642)	22.4(.882)	12.08(.476)
15	33.30(1.311)	39.2(1.543)	24.60(.969)	30.8(1.213)	19.70(.776)
25	47.10(1.854)	53.1(2.091)	38.30(1.508)	44.5(1.752)	32.40(1.276)
37	63.50(2.500)	69.4(2.732)	54.80(2.157)	61.4(2.417)	47.72(1.879)


Material:

- * Insulator: Glass filled polyester UL 94V-0
- * Contact: Phosphor Bronze
- * Shell: Steel, Tin plated as standard

Ordering Code:

CD91 25 S * * S0
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Contacts: 9,15,25,37
- ③ Contact type: S= Receptacle
- ④ Plating option:
 2= Gold flash plated over 1.27μm(50μ") Nickel
 A= Selective Gold flash plated over 1.27μm(50μ") Nickel
 B= Selective 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
 C= Selective 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ⑤ Insulator Color: 1= Black
 7= Blue
- ⑥ Other Option:
 S0= Metal shell with ø3.4mm holes with S/R(Standard)
 S3= Metal shell with ø3.4mm holes without S/R

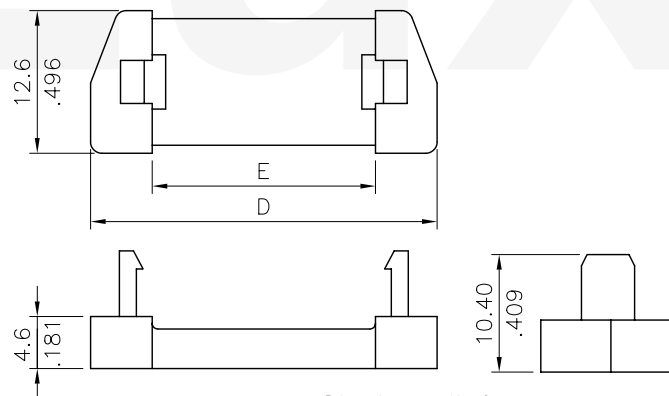

Strain relief

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: INSULATION DISPLACEMENT D-SUB FEMALE CONNECTOR	瀚荃股份有限公司 CviLux Corporation
③						DRAWN BY: Karen	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②	Karen	2/03/09'	ECN09043			ENGINEER: Eisley	.X ± 0.30/.012 .X' ± 1"	FINISH:	
①	SUN	4/12/04'	ECN04153/ECR04035-0			CHECKED BY: Eisley	2/04-09'		.XX ± 0.20/.008 .X' ±
SYM	NAME	DATE	REVISIONS			APPROVED BY: Alex	2/04-09'	.XXX ± 0.10/.004 .XX' ±	DRAWING NO. CD9103SE
									PART NO. CD91**S**S*
									SCALE 2 / 1
									SHEET 1 OF 1