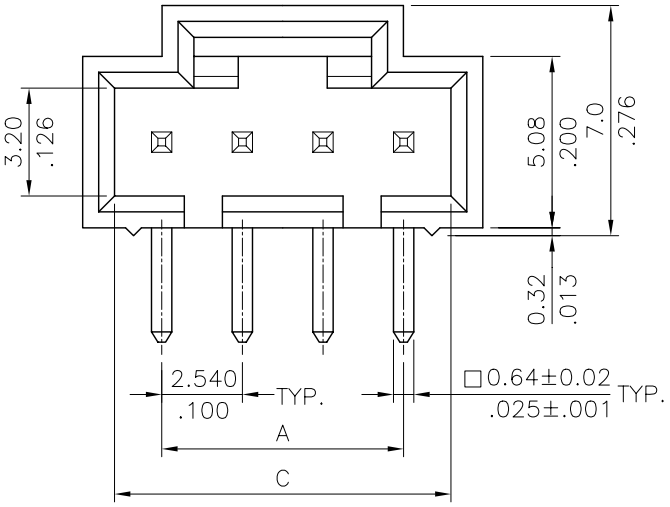

For 4 Through 18 Circuits

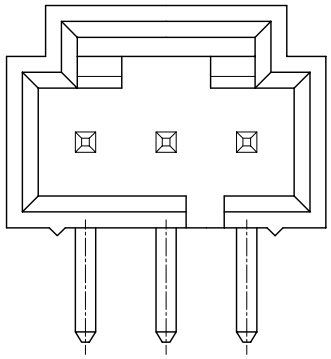

For 3 Circuits

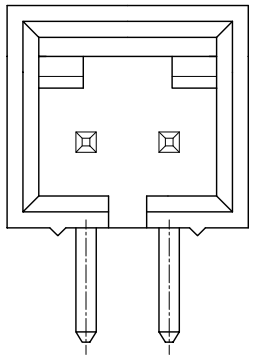

For 2 Circuits

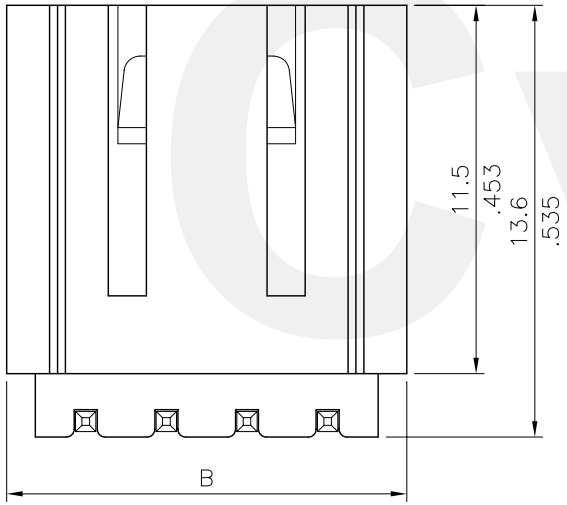

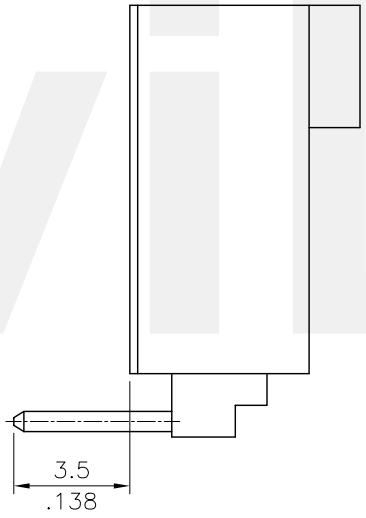

A = 2.54 x No. of Spaces
B = A + 5.1
C = A + 2.98
* Available in 2 through 18 circuits

Material:
* Insulation: Glass filled polyester UL 94V-0
* Contact: Brass

Ordering Code:

CI33	**	P	1	H	1	0
①	②	③	④	⑤	⑥	⑦

① Series No.
② No. of Circuits
③ Contact type: P= Pin header
④ Plating option:
1= 3.05μm(120μ") Min. Tin over 0.76μm(30μ") Nickel
2= Gold flash plated over 1.27μm(50μ") Nickel
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
⑤ Tail Style: H= Right angle
⑥ Color: 1= Black
⑦ Option:

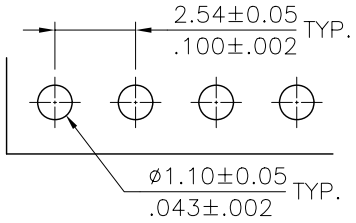

Recommended P.C. Board Layout

RoHS Compliant

SYM	NAME	DATE	REVISIONS			DATE
4			CVILUX.CORP 2002.05.20 ISSUED			
3				DRAWN BY:	Eisley	05/20-02'
2				ENGINEER:	David	05/20-02'
1				CHECKED BY:	David	05/20-02'
				APPROVED BY:	Alex	05/20-02'

UNIT: mm / inch

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X	± 0.30/.012	X.° ± 1°
.XX	± 0.20/.008	.X° ±
.XXX	± 0.10/.004	.XX° ±

TITLE: 2.54MM(.100") RIGHT ANGLE HEADER

MATERIAL:

FINISH:

瀚荃股份有限公司
CviLux Corporation

DRAWING NO.	CI3302SD	PART NO.	CI33**P*H10
SCALE	4 / 1	SHEET 1 OF 1	