RoHS compliant

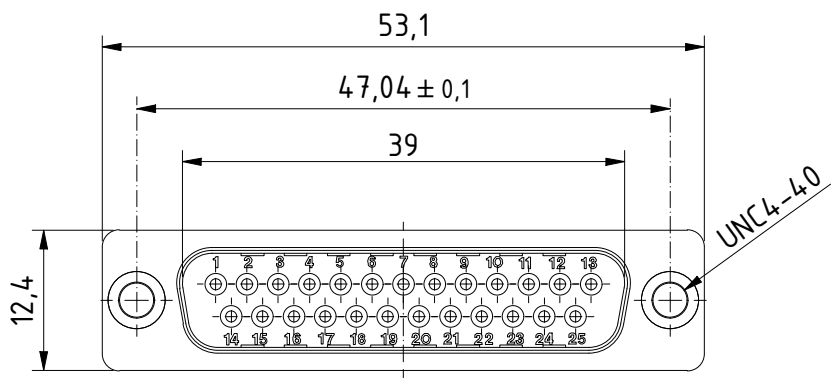



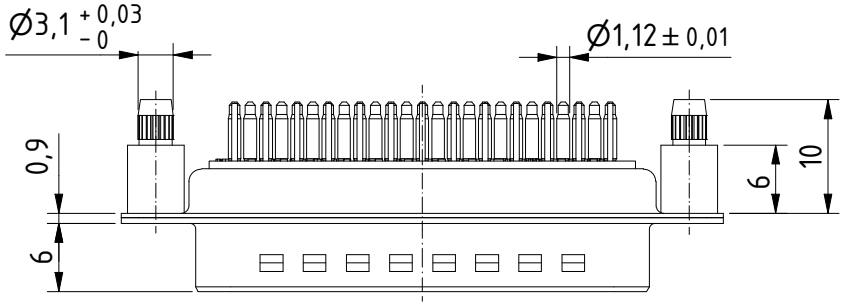

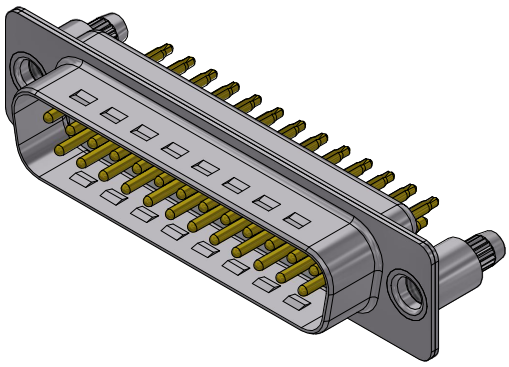

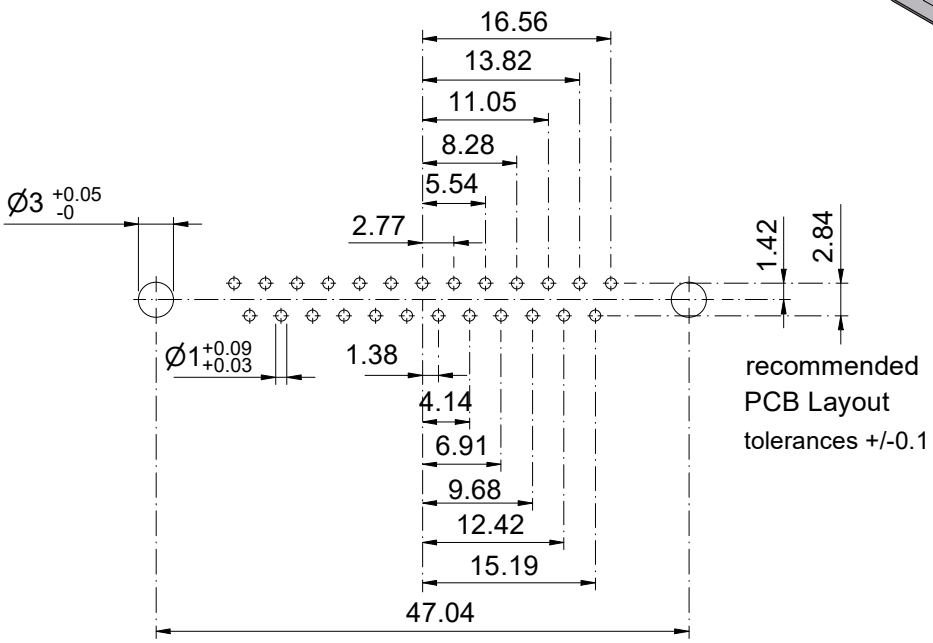

recommended
PCB Layout
tolerances +/-0.1

General tolerances (Deltron standard)				
size in mm	> 0.5 up to 3	> 3 up to 6	> 6 up to 30	> 30 up to 120
tolerances	±0.1	±0.2	±0.2	±0.3

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 1
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

	All dimensions in mm	Rev.	Rev.	Rev.	DE019767 part no.
		Rev.	Rev.	Rev.	

DTS25PPFF/1M96UN	1.5:1 scale	drawn	27.07.2022 mz
		checked	
		approved	

DELTRON SWISS
CONNECT 2 CUSTOMIZE

Industrie Neuhof 8c
CH-3422 Kirchberg
www.d-sub.swiss

K065212
drawing no.

Plotdate: 08.08.2022 09:16:48

Copyright by Deltron AG This drawing may not be copied, reproduced or distributed in any way without written permission. Drawing subject to change.