
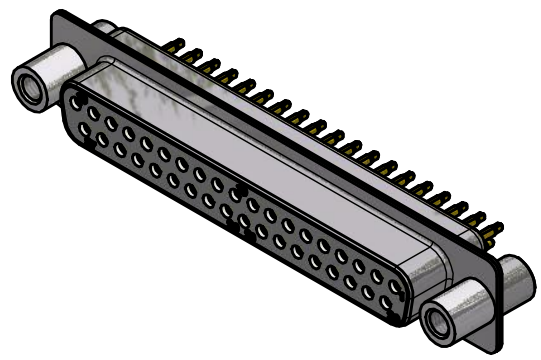
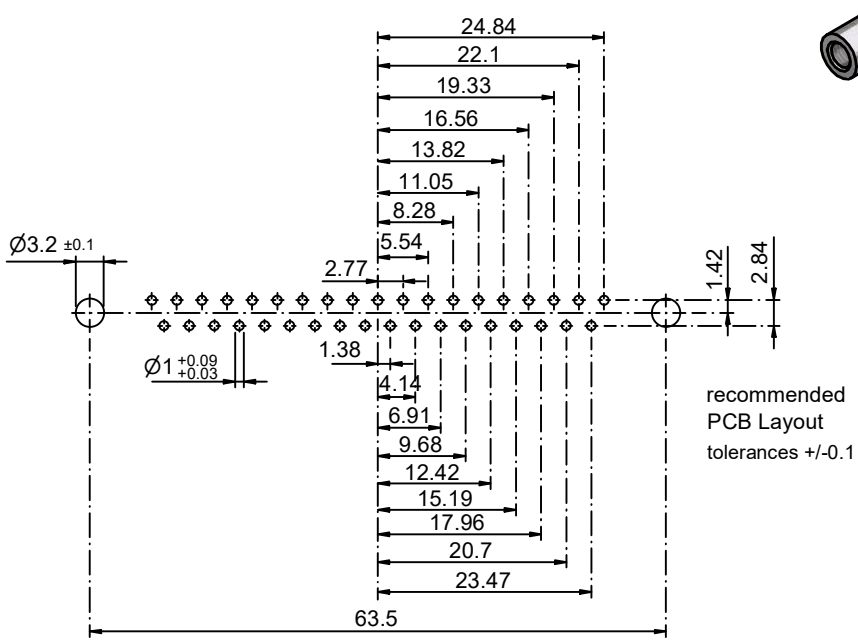
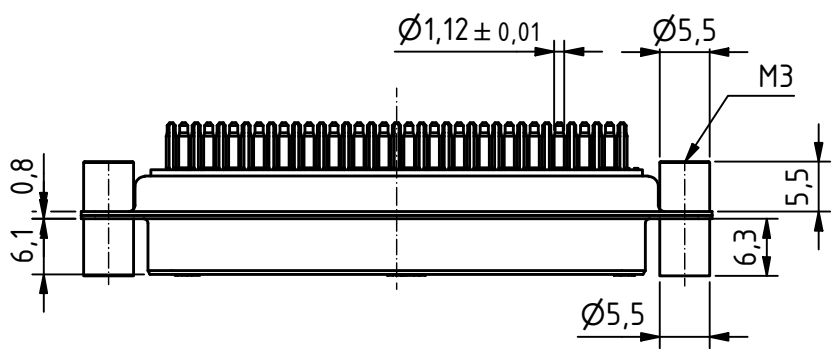



RoHS compliant

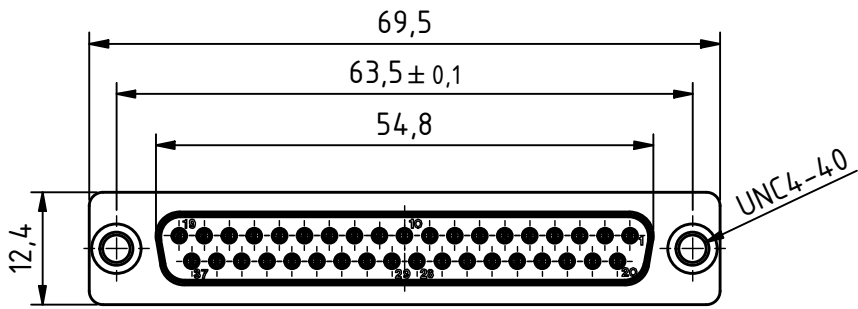

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARACTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55°C to +125°C

General tolerances (Deltron standard)	
size in mm	
> 0.5	±0.1
up to 3	±0.2
up to 6	±0.2
up to 30	±0.2
> 6	±0.2
up to 120	±0.3
> 30	±0.3
tolerances	

	All dimensions in mm	Rev.	Rev.	Rev.	DExxxxxx part no.		
		Rev.	Rev.	Rev.	drawn	12.01.2021	rop
DTS37SPFF/2M15UN				1.2:1 scale	checked		
				Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss	K064325 drawing no.		