

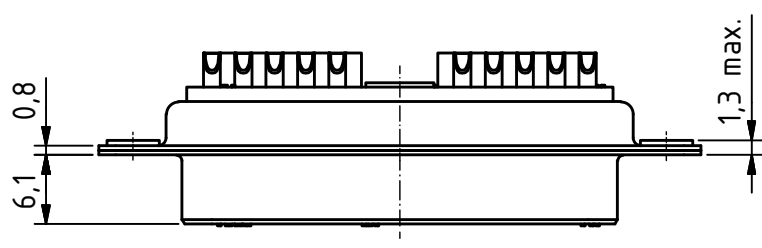


RoHS compliant

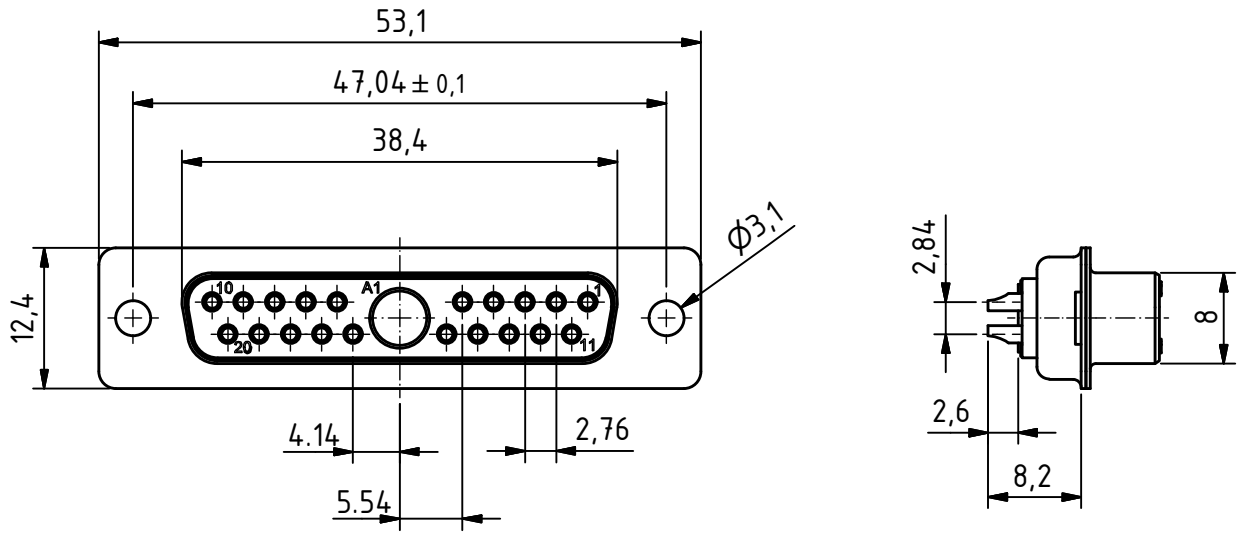

suitable for cable AWG 18 (single solid wire)

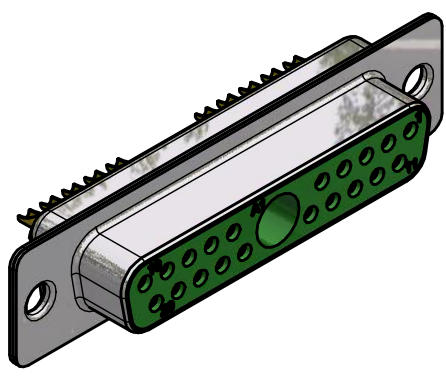

General tolerances (Deltron standard)			
size in mm	> 0,5 up to 3	> 3 up to 6	> 6 up to 30
tolerances	±0,1	±0,2	±0,2
			±0,3
			up to 120

**MATERIALS**

- Insulator: Thermoplastic UL 94-V-0 green
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

**CHARAKTERISTICS**

- Working voltage: 125V
- Current rating: 7.5A/xxA
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

	All dimensions in mm	Rev.	Rev.	Rev.	DE001936		
		Rev.	Rev.	Rev.	part no.		
DTS21W1SZ/2				1.5:1 scale	drawn	14.12.2012	nf
					checked		
					approved		
				Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss		K051097	
						drawing no.	