
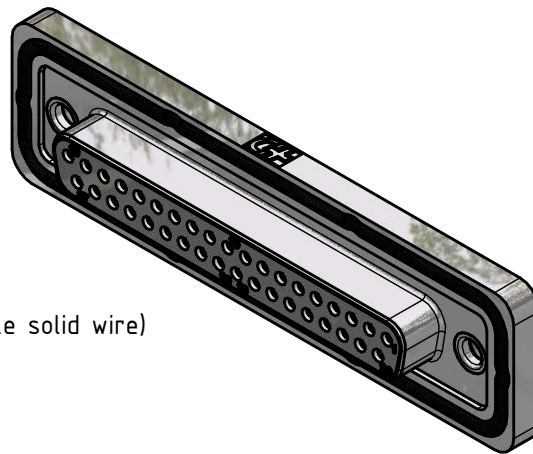
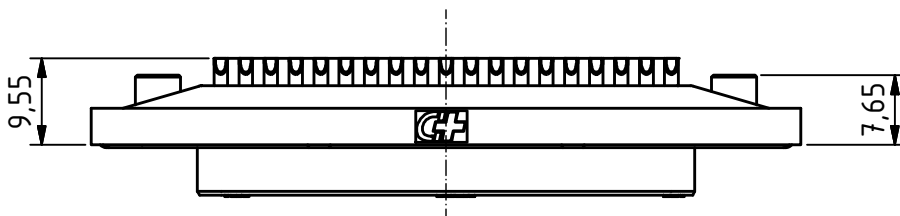



RoHS compliant

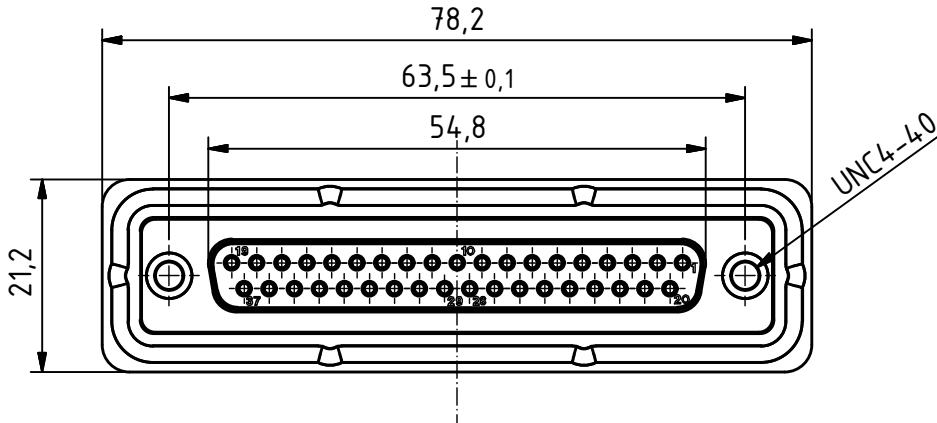

suitable for cable AWG 18 (single solid wire)

Waterproof IP68  
Frame with O-ring sealing for back panel mounting

**MATERIALS**

- Insulator: Thermoplastic UL 94-V-0 white
- Frame: Zinc diecasting nickel plated
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

**CHARAKTERISTICS**

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Delttron standard)			
size in mm	> 0.5	> 3	> 6
up to 3	±0.1	±0.2	±0.2
up to 6			±0.2
up to 30			±0.2
up to 120			±0.3
tolerances			

	All dimensions in mm	Rev.	Rev.	Rev.	DE017071 part no.
		Rev.	Rev.	Rev.	
DTSWM37SZ/2M85UN				1.2:1 scale	drawn 19.11.2015 mw checked approved
			Industrie Neuhof 8c CH-3422 Kirchberg www.d-sub.swiss	K062346 drawing no.	