

SPECIFICATION FOR APPROVAL



COMMODITY	CHIP BEAD	SPEC NO.	SP-060925111
ITEM	SCB 321611A-601/2 Green	TRR-002	

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	3.2	±0.2
	B	1.6	±0.2
	C	1.1	±0.2
	D	0.5	±0.3
	E		
	F		
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	600 ± 25% Ω	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer.
TEST FREQUENCY	100 MHz	<input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter.
RDC	0.1 (max) Ω	<input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer.
IDC	2000 (max) mA	<input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.
		<input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.
		<input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter.
		<input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.

REMARK :


PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
		Green	Johnson

TEST REPORT



COMMODITY : CHIP BEAD	SPEC NO : SP-060925111
Type : SCB 321611A-601/2	TRR-004

Typical Impedance v.s. Frequency Curve

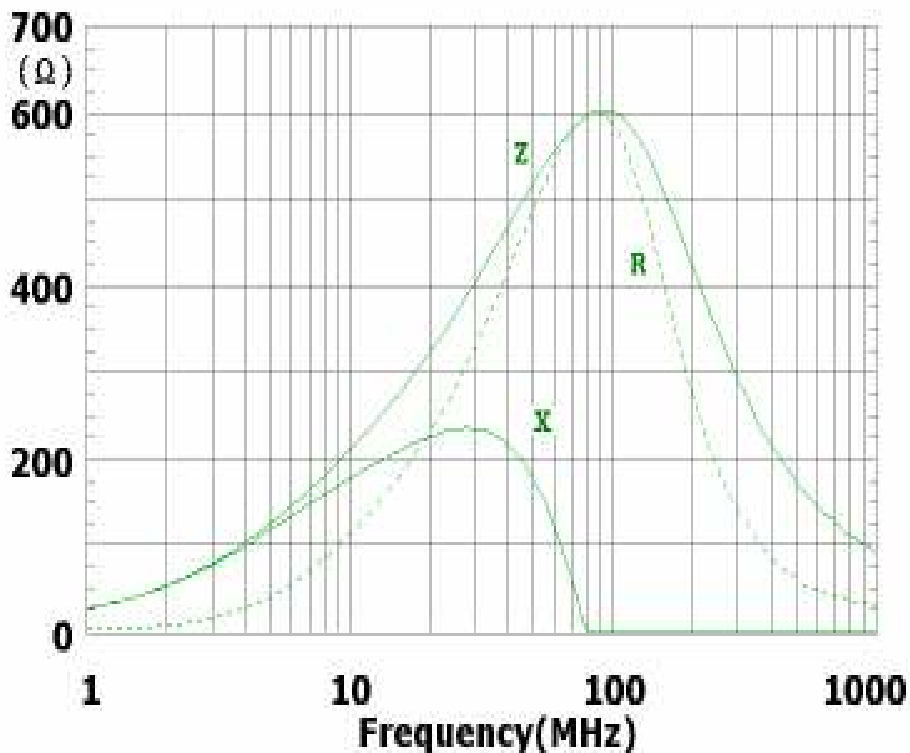

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by : Green	Test by :
---------------------	-----------