



Rev.	Description	Date

1. PHYSICAL CHARACTERISTICS (mm)

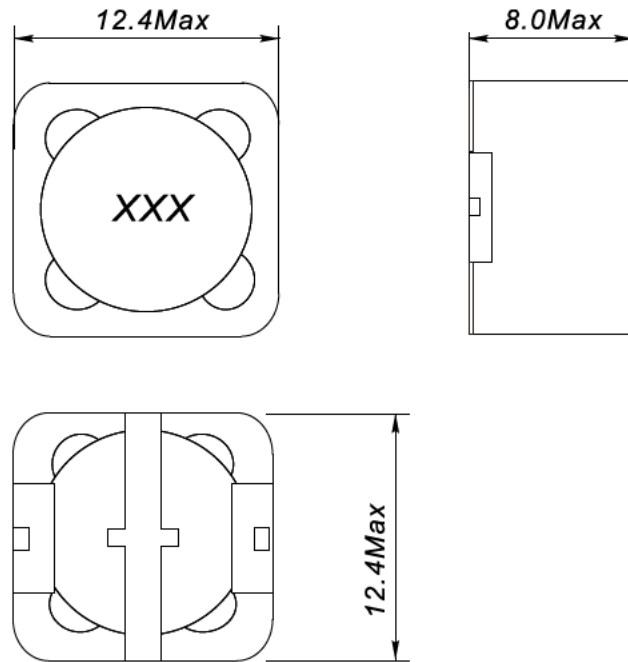

2. ELECTRONICAL SCHEMATIC



3. ELECTRONICAL SPECIFICATIONS

L: 150uH ± 10% @ 1KHz, 0.5V
DCR: 0.28Ω Max
IDC: 1.42A Max
L(idc): ≥ 80%L

Test Instrument:

L: HP4284A
RDC: HM2540

Note:

- Solderability:** leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability:** UL94V-0
- ASTM oxygen index:** >28%

NAME:		Power Inductors	
		DATE:	2018-03-14
PART NO.		SDRH1207-151K	REV: A0
		PAGE	
DRAWN BY	CHECKED BY	APPROVE BY	