


RECOMMENDED P.C.B LAYOUT

F: \_\_\_\_\_ mm C: \_\_\_\_\_ mm D: \_\_\_\_\_ mm

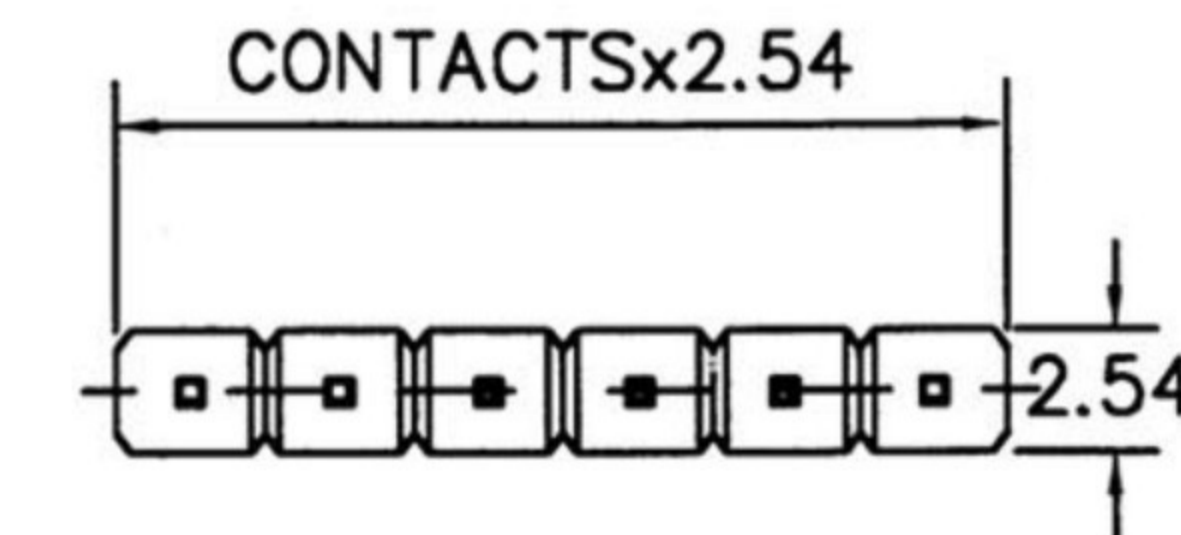

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0  
CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A  
OPERATING TEMPERATURE: -55°C TO +105°C  
CONTACT RESISTANCE : 20 MILLIOHMS MAX  
INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
WITHSTANDING VOLTAGE : AC 1000V RMS

<div style="border: 1px solid black; padding: 2px;">RoHS Compliant</div>			
APPD.		TOLERANCE	
DWG. HELEN		.0 ± 0.38	PART NAME
DATE	UNIT	ANG. ± 5°	
2008/7/21	M M	SIZE. A 4	H=1.5mm XXP STRAIGHT TYPE
	PAGE	REV. A	(C=Xmm D=Xmm) ROHS LOW-LEAD
	1 OF 1		PART NO. SM C02 2102 XXAS