

1 2 3 4 5 6 7 8

SM C02 2818 XX BD H=Y,Ymm; - Z; Pegs

XX- Contact No.
 Y,Y= Height of Plastic
 Z- Packaging : unmarked - Bag






- : T - Tube
- : R - Reel Packing
- : P - Pad + Tube Packing
- : Q - Pad + Reel Packing

Pegs: unmarked - without
 Pegs- with Pegs

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000M Min.Ω
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20m MaxΩ
 Operating emperature:-40°C to +105°C
Materials
 Contact Material: Phosphor Bronze
 Insulation Material: PA6T UL 94V-0

All materials must be GP materials

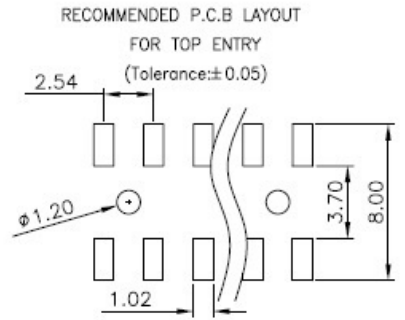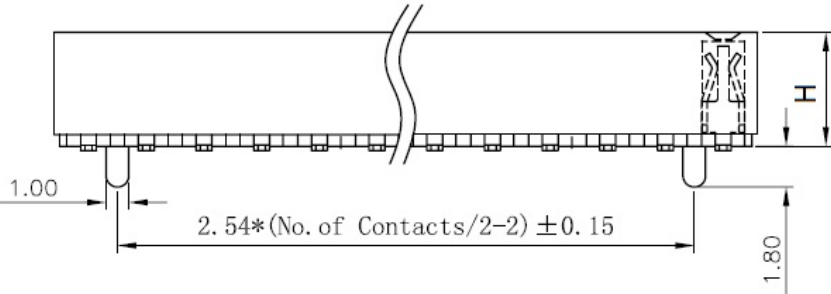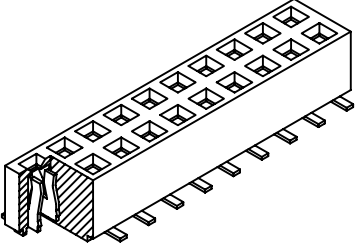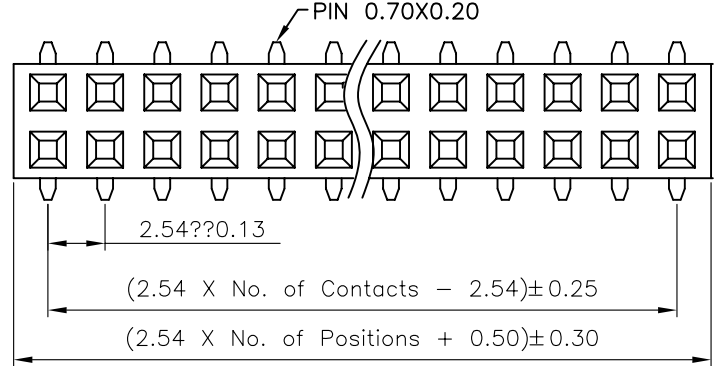

Unless otherwise specified tolerance	
X. ±0.35	X. XX: ±0.20
X. X: ±0.25	X. XXX: ±0.15
SCALE:	UNIT: mm
DRAW: Walter	DATE: 14 12 2017
CHECK: Vanda	DATE: 14 12 2017
 3 d ANGLE PRO EC ON	



T T E:
SM C02 2818 XX BD H=Y,Ymm

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		

PRODUCT NO:

1 2 3 4 5 6 7 8