



PCB Layout
(Top View)

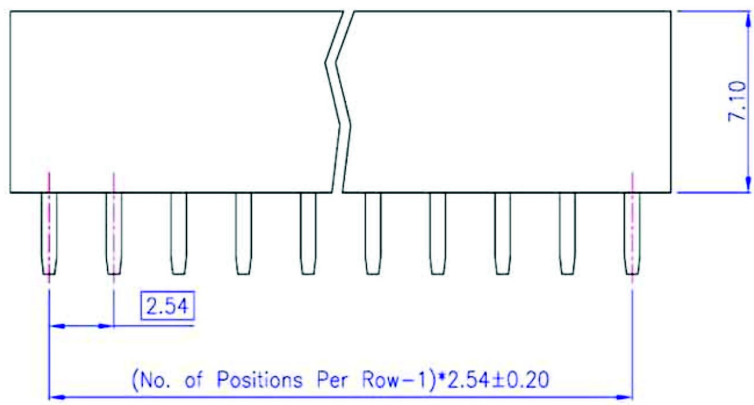

Material and Finish	Electrical Characteristics	Mechanical Characteristics
1. Housing: Thermoplastic (UL94V-0), Black. 2. Terminal: Copper Alloy (t=0.25mm), Gold Plating.	1. Current Rating: 3.0 Amp. Max. 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohms Min. at 1000V DC. 4. Contact Resistance: 30m Ohms Max.	1. Operating Temperature: -55°C ~ +105°C

SCHMID-M

UNIT	SCALE	PART NAME	
MM		2.54mm FEMALE HEADER DUAL ROW 180° H:7.1mm	

2006/01/02	DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.
	<i>Jolin</i>					SM C02 2826 XXBS	A