


**Specifications**

Current Rating: 1Amp  
 Insulation Resistance: 1000M Min.  $\Omega$   
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20m Max  $\Omega$   
 Operating Temperature: -40°C to +105°C


**Materials**



Contact Material: Brass  
 Insulation Material: Polyester, UL 94V-0  
 NYLON-6T  
 All materials must be GP materials



Recommended P.C.B Layout

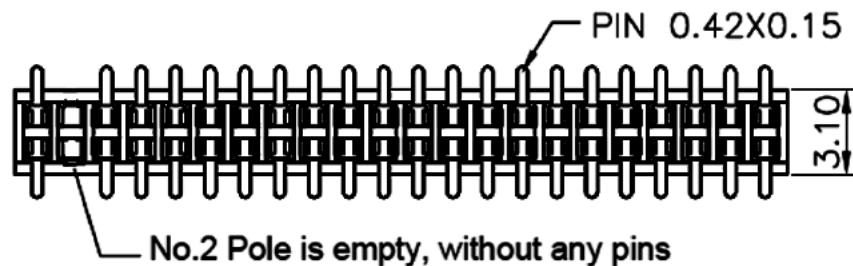(Tolerance: ±0.05)



TOLERANCE			
SCALE	UNIT mm		
DRAW Walter	DATE 21.2.2019	TITLE SM C02 4835 XX BD WO-L2 H=4.30 With Cap	
CHECK Vanda	REV	REEL	
		DESCRIPTION Female Header Dual Rows SMT Plastic Height 4,3mm Row 2 Empty XX: Nr. Poles	