


ROHS COMPLIANT

N=No. OF CONTACTS/2

SPECIFICATION

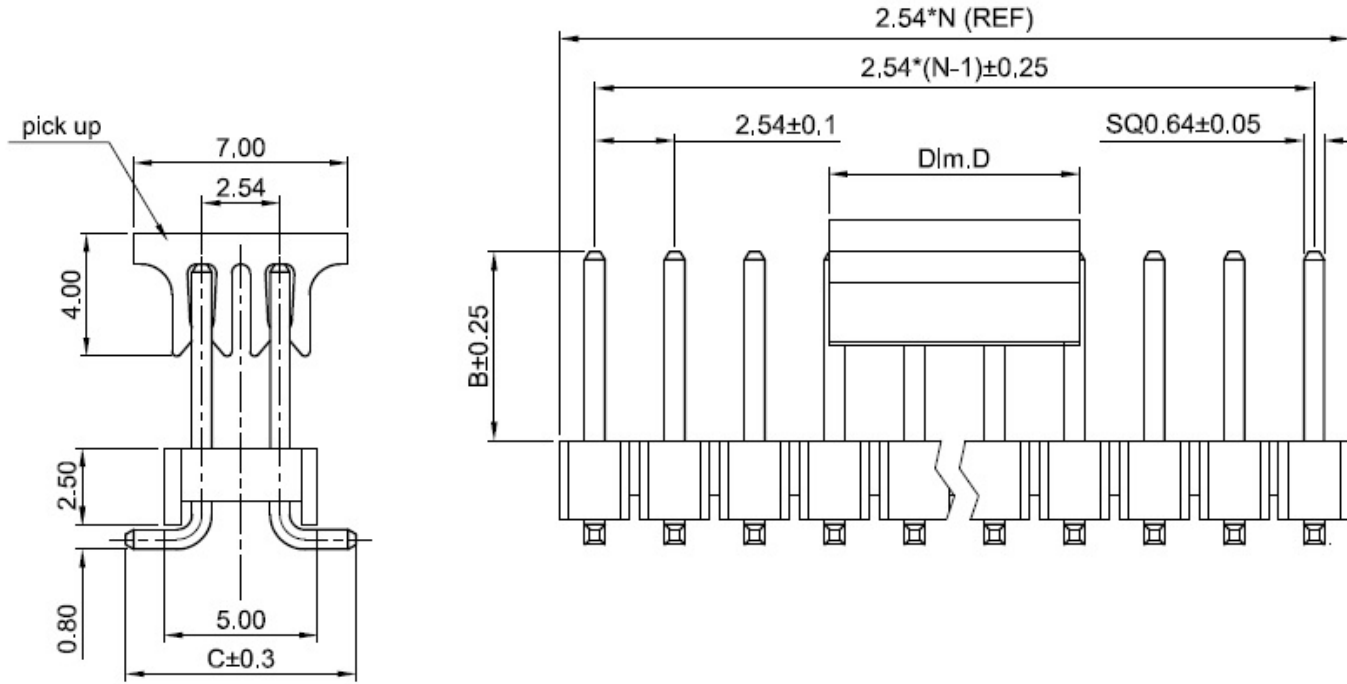


Current Rating: 3 Amp  
 Insulation Resistance: 5000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Soldering Temperature: 260°C for 3 - 5S Max  
 Contact Material: Brass  
 Insulator Material: P46 or PA6T,UL 94V-0



Contact Plating: Gold Flash

TABLE A:

pos.	Dim.	Dim.D
2~8pin		5.0mm
9~40pin		8.0mm

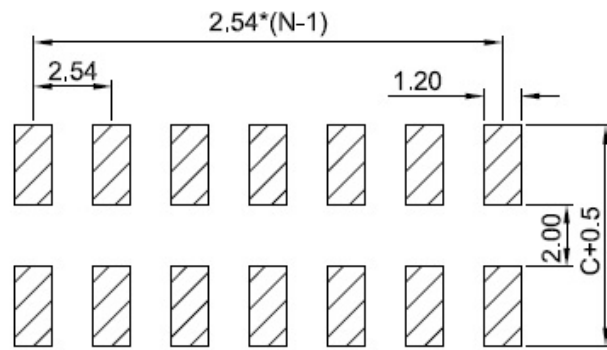TYPE	Dimension	
	B	C
1	6.00	7.50
2		



TOLERANCE		
SCALE	UNIT mm	
DRAW Valter	DATE 27.2.2020	TITLE
CHECK Forester	REV	SM C02 2200 XX BD-CAP-REEL
		DESCRIPTION
		2,54mm Pin Header Dual Rows SMT