


1 2 3 4 5 6 7 8

A (No. of Positions Per Row)*2.54+0.40±0.30 (No. of Positions Per Row-1)*2.54±0.20 A



PCB Layout
(Top View)

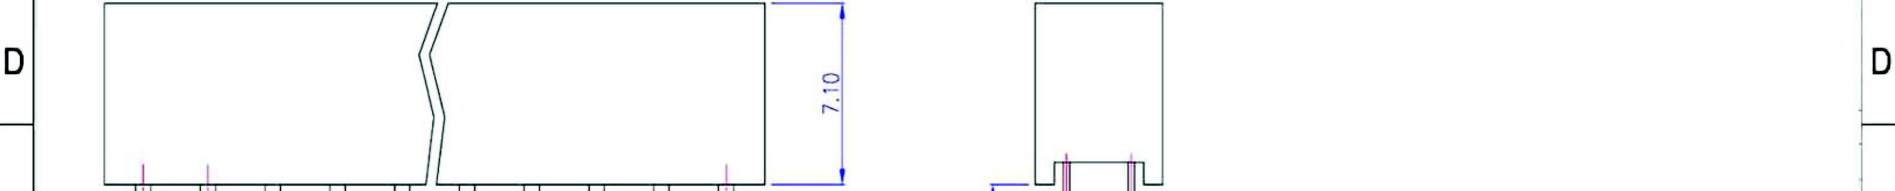

Storage temperature: 5~ 30°C
Relative humidity: 30%~70%

F (No. of Positions Per Row-1)*2.54±0.20 F

Material and Finish	Electrical Characteristics	Mechanical Characteristics
1. Housing: Thermoplastic (UL94V-0), Black. 2. Terminal: Copper Alloy (t=0.25mm), Gold Plating.	1. Current Rating: 3.0 Amp. Max. 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds. 3. Insulation Resistance: 1000M Ohms Min. at 1000V DC. 4. Contact Resistance: 30m Ohms Max.	1. Operating Temperature: -55°C ~ +105°C

G SCHMID-M UNIT SCALE PART NAME G



UNIT		SCALE	PART NAME	
MM			2.54mm FEMALE HEADER DUAL ROW 180° H:7.1mm	

H 2006/01/02 DRAWING. APPROVED APPD. CKD. TOLERANCE PART NO. REV. H

2006/01/02	DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.
	Jolin					SM C02 2826 XXBS	A

1 2 3 4 5 6 7 8