


Recommended P.C.Board
Top Entry Layout

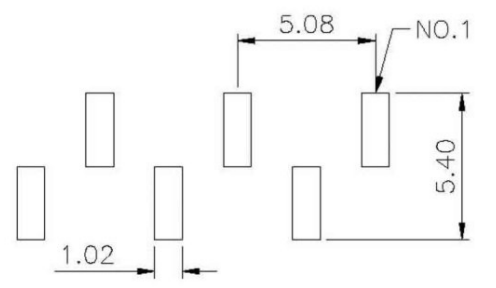

Specifications

- Current Rating: 3Amp
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding: 600V AC
- Contact Resistance: 20mΩ Max.
- Operating Temperature: -40°C to +105°C

Materials

- Contact Material: Phosphor Bronze
- Insulation Material: Polyester, UL 94V-0
Nylon 6T
- All materials must be GP materials

Recommended P.C.Board
Bottom Entry Layout

RoHS Compliant		SCHMID-M	
A?PD. Angel	SCALE	GENERAL TOLERANCE X' ± 5' X ± .X' ± 2' X ± 0.35 .XX' ± 1' XX ± 0.25 .XXX' ± 0.5' XXX ± 0.13	PART NAME 2.54mm FEMALE HEADER SINGLE ROW H:5.0mm XXP SMT B TYPE LOW-LEAD
DWG.	UNIT MM	SIZE. A 4	PART NO. SM C02 2828XX B
DATE 2009/02/03	PAGE 1 OF 1	REV. A	