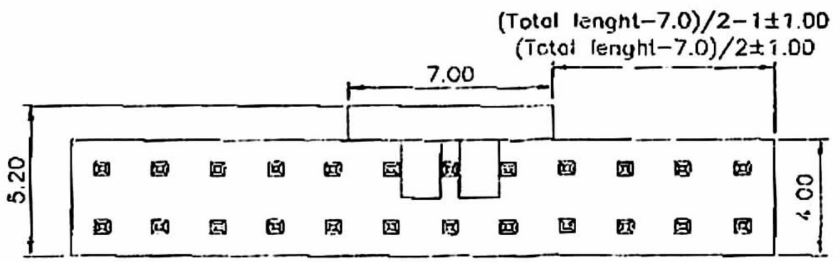

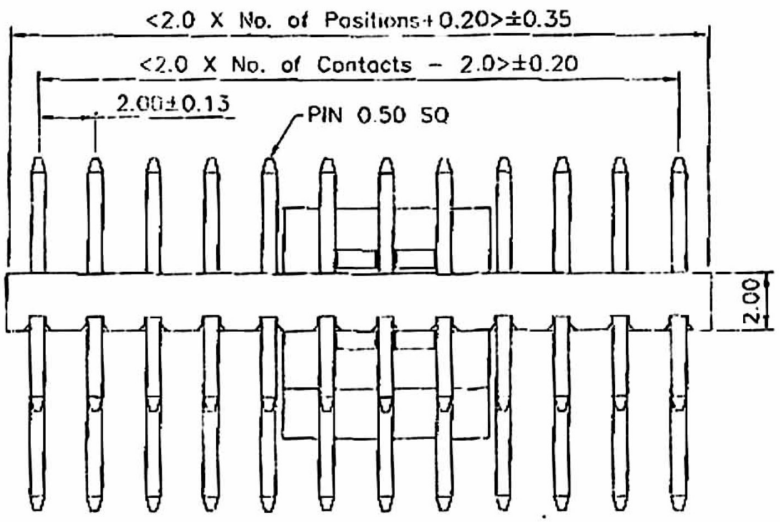

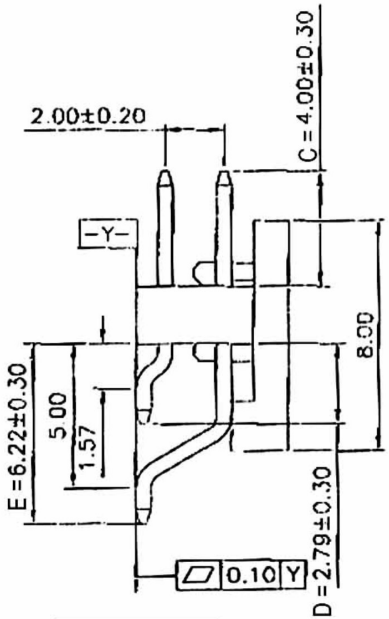

Specifications

Current Rating: 2Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Brass
Insulation Material. Polyester, UL 94V−0
Nylon 6T
All materials must be GP materials

Recommended P.C Board Layout
(Tolerance:±0.05)



RoHS Compliant

SCHMID-M

APPD. Betty	SCALE	TOLERANCE X° ± 5° X. ± 0.30 .X° ± 2° .X ± 0.20 .XX° ± 1° .XX ± 0.15 .XXX° ± 0.5° .XXX ± 0.10	PART NAME 2.0mm PIN HEADER DUAL ROW HORIZONTAL SMT H=4.0mm C=4.0 D=2.79 E=6.22mm ROHS LOW-LEAD
DWG. Jolin	UNIT MM	SIZE. A4	PART NO. SM C02 6201 XXBD
DATE 2006/10/11	PAGE 1 OF 1	REV. A	