
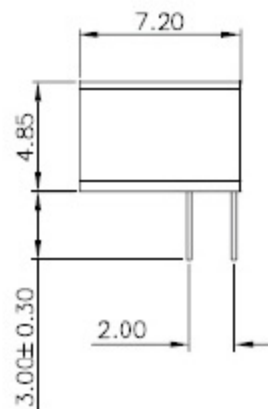


Specifications


Current Rating: 2Amp
 Insulation Resistance: 1000M Min. Ω
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20m Max Ω
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Contact Plated: All Gold Flash 1u"
 Insulation Material: Polyester, UL 94V-0
 PA 6T
 All materials must be GP materials

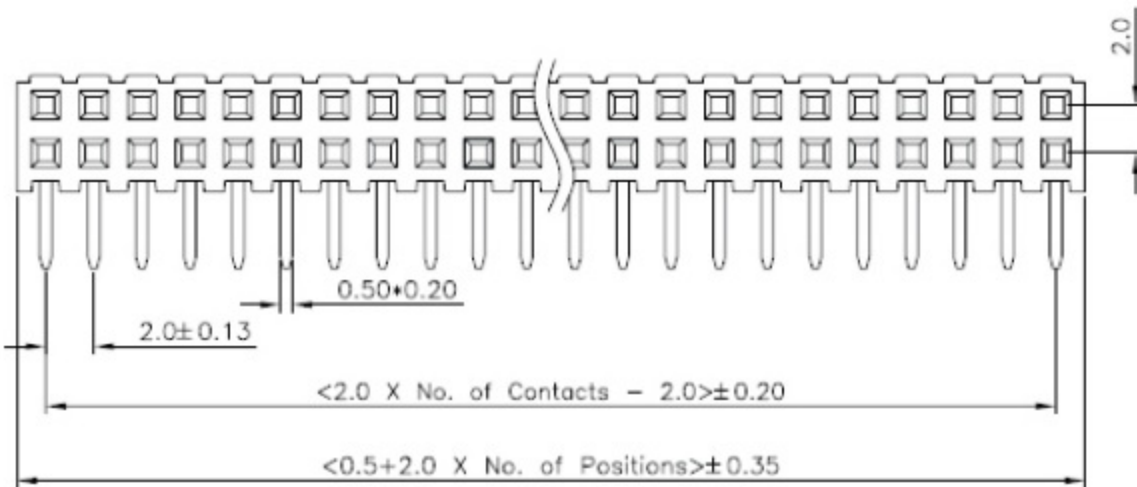

RECOMMENDED P.C.B LAYOUT

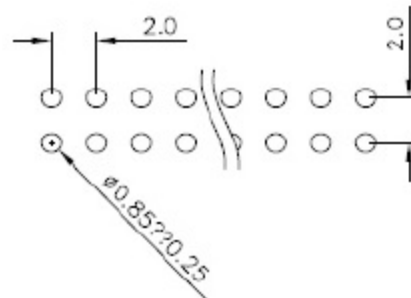

RoHS Compliant		SCHMID-M	
APPD.	SCALE	TOLERANCE	PART NAME
DWG.	UNIT	ANG ±	Schmid-M Female Header 90° 2,0x2,0mm XX pinØ 7,2x4,58mm
DATE	PAGE	SIZE	PART NO.
	1 OF 1	A4	SM C02 6241 XX DR
		REV.	C