

250V 4A

Poles: 2P/3P/4P/5P/6P/7P/8P/11P

Pitch: 5.08mm (. 200"), 7.62mm (. 300")


Materials

Housing: PPO

Solder: Brass, Tin Plated

Ambient temperature: -40°C ~ +105°C

Note: The protrusile point which is marked with "A" only exists in the 2 pin type product

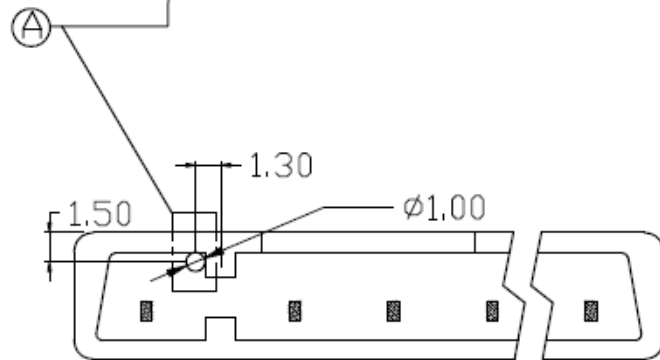

TOLERANCE		SCHMID-M
SCALE	UNIT mm	
DRAW Johnson	DATE 2.2.2016	TITLE SM C03 7258 XX SW
CHECK Jason	REV	DESCRIPTION Crimp Connector 5,08mm+7,62mm Wafer Straight