


|                      |                    |      |
|----------------------|--------------------|------|
| Standard             | UL                 | VDE  |
| Rated Voltage        | 300V               | 320V |
| Rated Current        | 15A                | 20A  |
| Withstanding Voltage | AC2500V/1Min       |      |
| Ambient Temperature  | (-)40°C to +105°C  |      |
| Pitch                | 5.00 (.197")       |      |
| Poles                | 2P, 3P --Any poles |      |
| Housing              | PA66, UL94V-0      |      |
| Solder Pins          | Brass, Ni plated   |      |

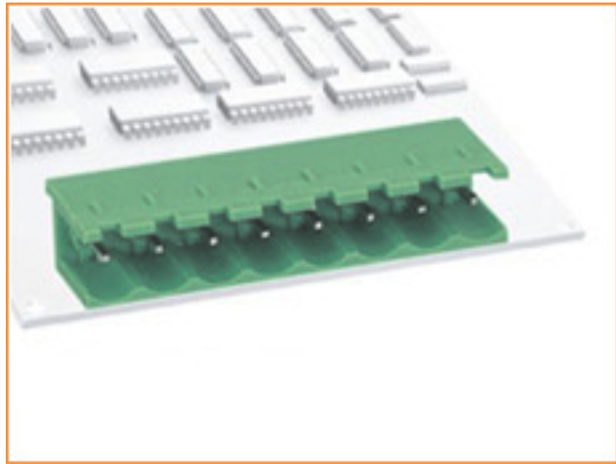

|                |             |                                  |  |
|----------------|-------------|----------------------------------|--|
| RoHS Compliant |             | <b>SCHMID-M</b>                  |  |
| APPD.          | SCALF       | TOLERANCE                        | PART NAME  |
| DWG. HELGA     | UNIT M M    | XX ± 0.25<br>XX ± 0.35<br>ANG. ± | Pluggable Terminal Block PCB Right<br>Angle Side Open Frame With Fix Screws<br>Green XX: No. Poles |
| DATE 2013/10   | PAGE 1 OF 1 | SIZE A 4<br>REV. C               | PART NO. SM C09 0502 XX RNC  |