


PCB LAYOUT

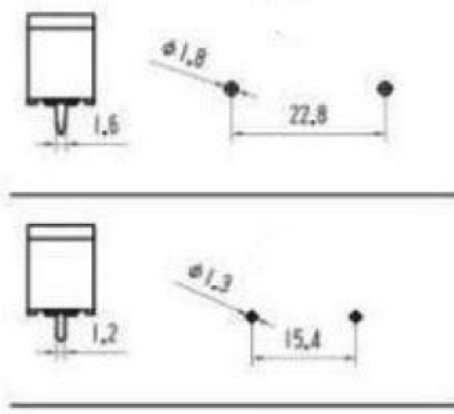

Rated Load 10A 250V AC
 Operating Temperature -10°C---+120°C
 Withstand Voltage AC1000V(50Hz)/Min
 Base PA +30%GF
 Cap PA +30%GF
 Terminal Brass Tin plated

TOLERANCE		SCHMID-M
SCALE	UNIT	
DRAW: Walter	DATE: 8.1.2018	TITLE
CHECK: Obst	REV	SM FUSE FBFB 1098 H+C
		DESCRIPTION
		PCB Fuse Holder 5x20