


1. INTERFACE PER MIL-STD-348
2. COUPLING NUT RETENTION: 15 INCH\*LBS
3. COUPLING NUT RETENTION: 60 LBS AXIAL
4. CONTACT RETENTION: 6 LBS AXIAL
5. INSULATOR RETENTION: 6 LBS AXIAL
6. DUREBILITY: TEST AFLER 100 CYCLES

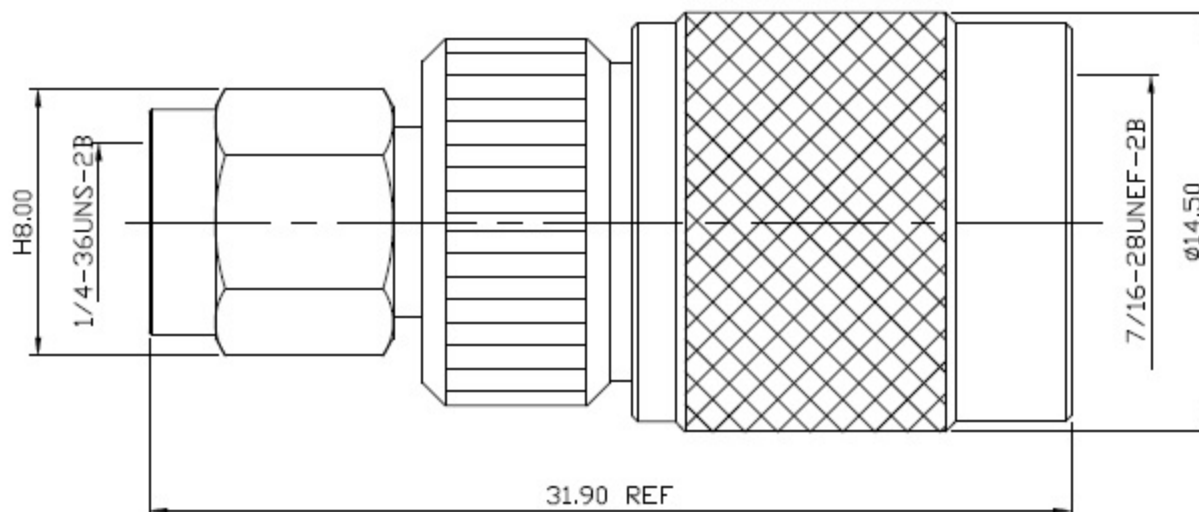

MATERIAL : BODY-BRASS  
 CONTACT-BRASS  
 INSULATOR-TEFLON  
 C WASHER-BRASS  
 SHELL-BRASS  
 GASKET-RUBBER  
 C WASHER-SUS 303  
 SI RUBBER-SILICONE

FINISH : BODY-NICKEL PLATING  
 SHELL-NICKEL PLATING  
 CONTACT-GOLD PLATING OVER NICKEL

DIMENSIONS ARE IN MILLIMETERS TOLERANCE			<b>SCHMID-M</b>	
· × ±0.5	ANGLE ±3°	SCALE	4:1	
· × × ±0.1		REV	B-1	
· × × × ±0.05		TITLE SMA PLUG TO TNC PLUG		
DRAWN		DATE	100.04.13	
APPROVAL		DATE	DRAWING NO SMAp-TNCp-609-TGN	
			FILE NO	